

AURORA Series 11.5KW AC Charger

TGA-AC-48A

For Residential, Hospitality, Workplace, Commercial Space


- Wide Compatibility** It charges every battery EV and plug-in hybrid EV with a SAE J1772 connector.
- Modern Design** Red Dot Award
Our chargers blend seamlessly into any home environment and add a touch of sophistication to your charging experience.
- Flexible** Wall-mount / Floor-stand
Hardwired input
- Smart Charging** APP connected through WIFI or Bluetooth
Remote control: Schedule charging, Reminding, Real-time monitoring
- Worry-free** Anti-welding protection • CCID 20 Leakage current protection
CSA listed and certified with highest standards
- Hassle-free setup** We offer easy-to-use mounting hardware, and a mobile app for simple connection.



Space Gray



Accessories

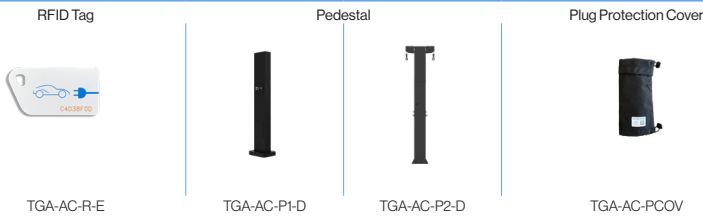

Model	TGA-AC-48A/H0/J1/R1/GR
Product Information	
Output Power	11.5KW
Connector	SAE J1772 (Type 1), 7.5m (25ft)
Input Voltage	208-240V AC, 60Hz
Input Current	48A (APP adjustable from 6A to max amps)
Holster	Separate
Input Line	Hardwired, 6 AWG (American Wire Gauge)
Network Type	L1+L2+G
Impact Protection	IK08
Electrical Protection	Over current, Residual current, Surge, Ground, Over/under voltage, Over/Under frequency, Over temperature
Leakage Current Protection	CCID 20
Environment	
Operating Temperature	-35°C - +50°C (-31°F - +122°F)
Operating Humidity	5% - 95%
Operating Altitude	<2000m
Installation	Wall-mount/Pole-mount
Enclosure	NEMA 4

Model	TGA-AC-48A/H0/J1/R1/GR
User Interface	
Housing Material	Plastic PC940
LED Indicator	Green/Yellow/Red
Connectivity	WiFi/Bluetooth
OCPP	OCPP 1.6 Json
RFID Reader	Mifare ISO/IEC 14443A
Charging Method	APP/Plug&Play/RFID
Certification and Standards	
Certification	CSA/IC (FCC equivalent in Canada)
General	
Product Dimension	344*192*101mm(H*W*D)
Package Dimension	430*330*315mm(H*W*D)
Net/Gross Weight	6kg/8kg
External Package	Carton